

FIG. 1.

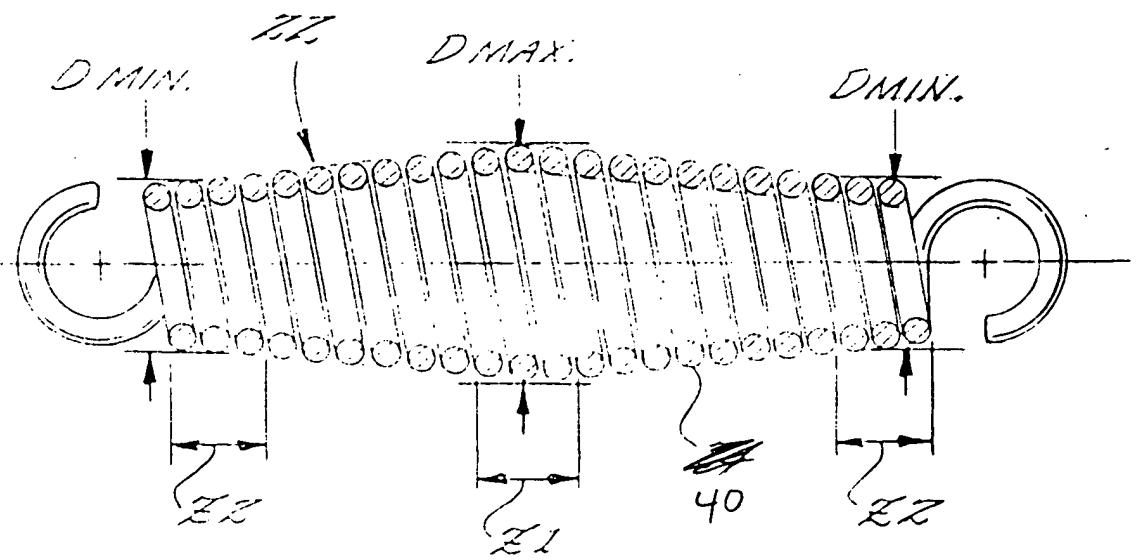


FIG. 2.

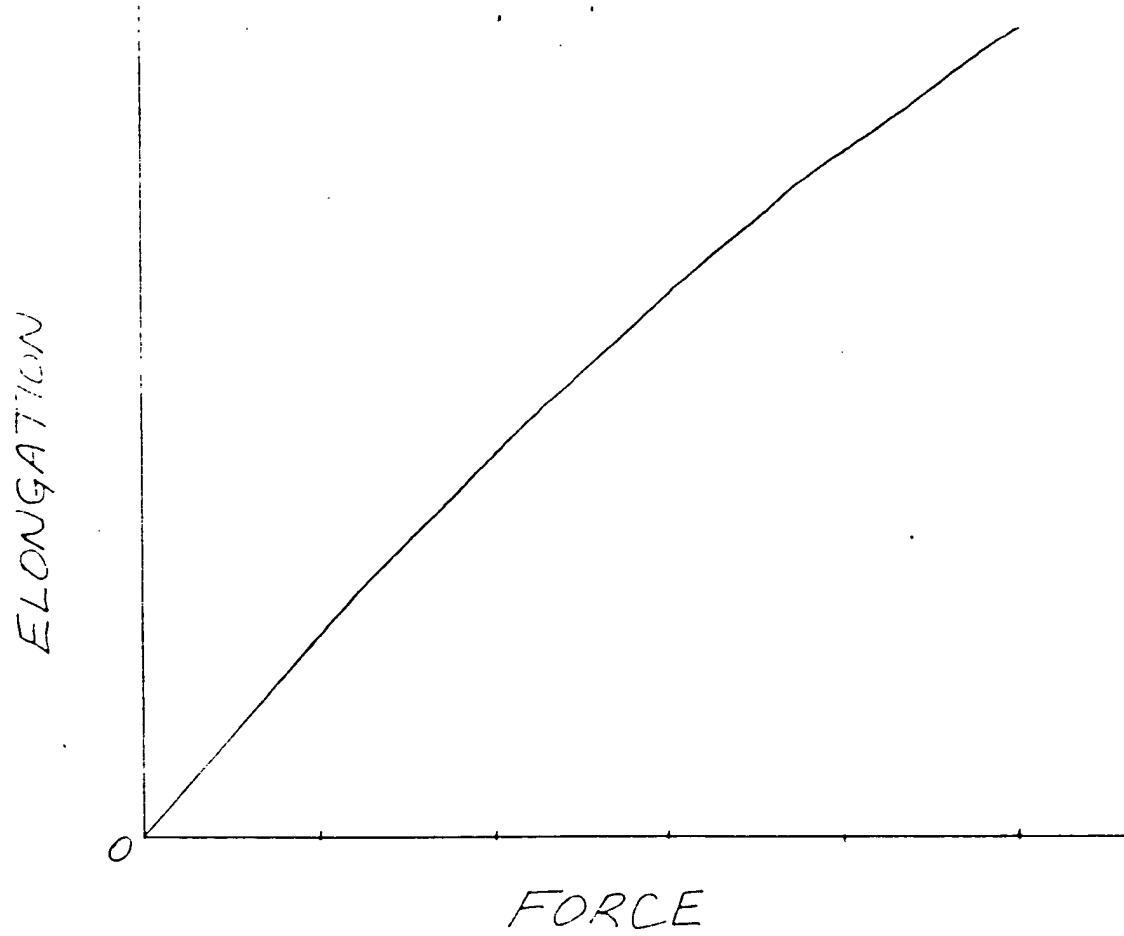
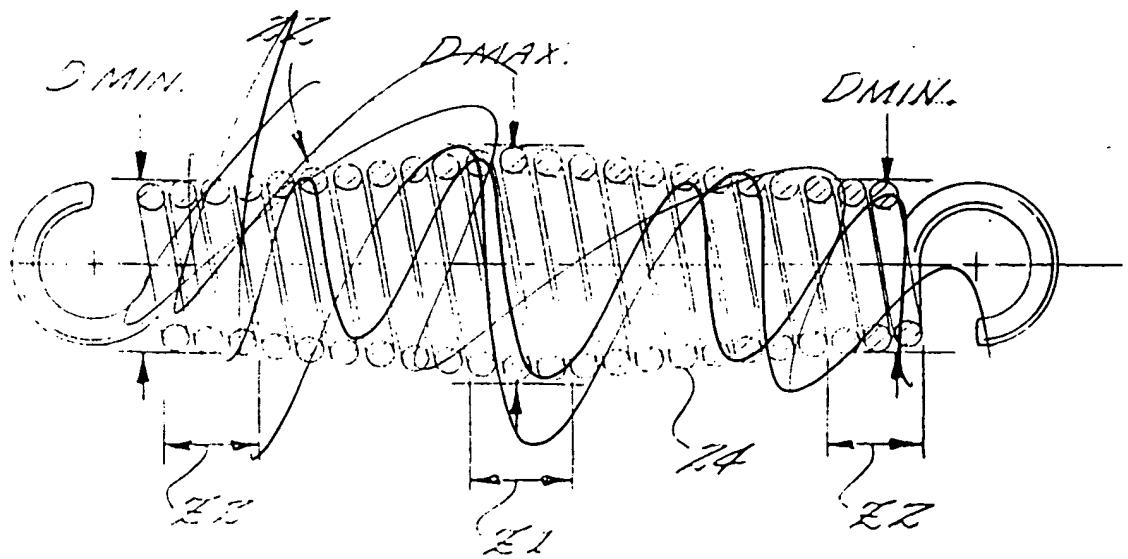
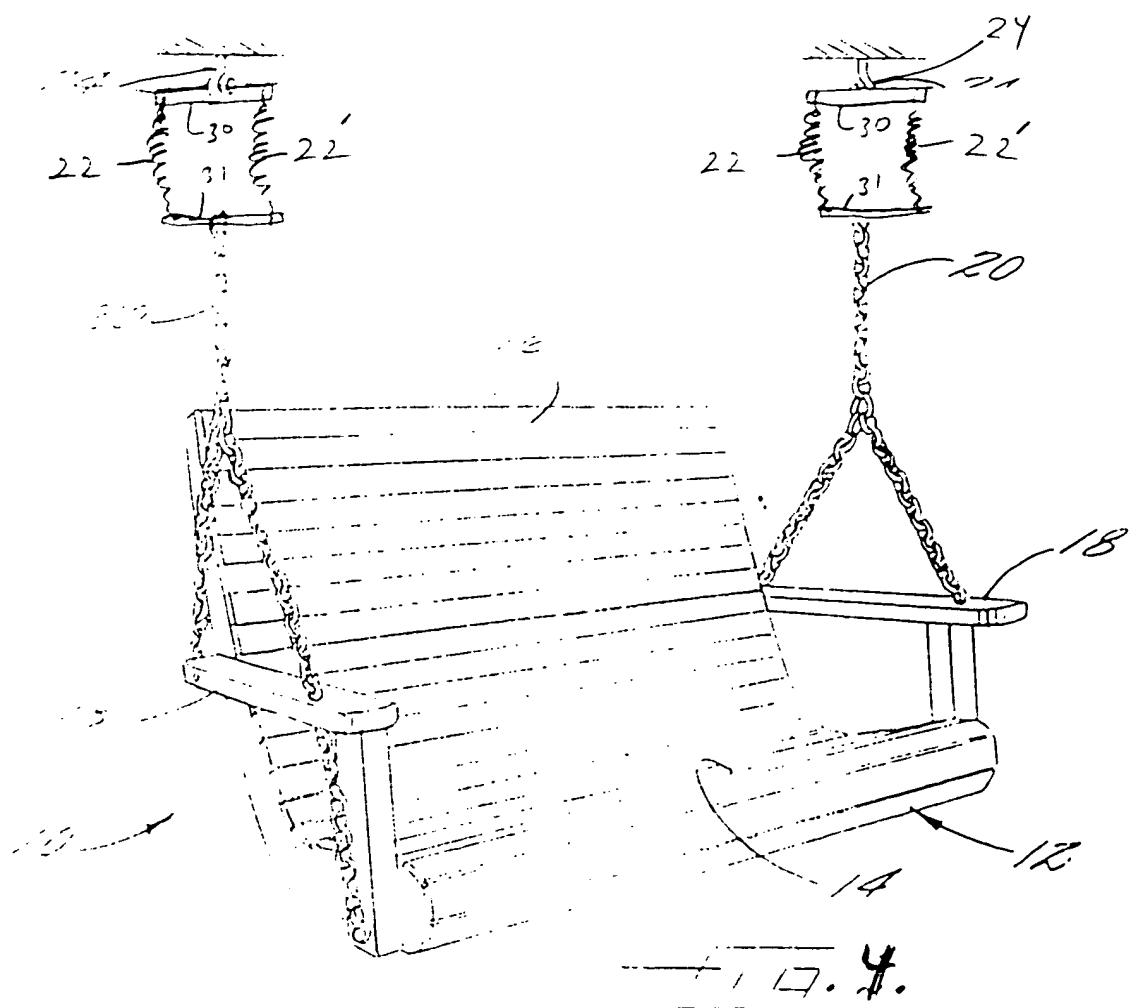


FIG. 3.



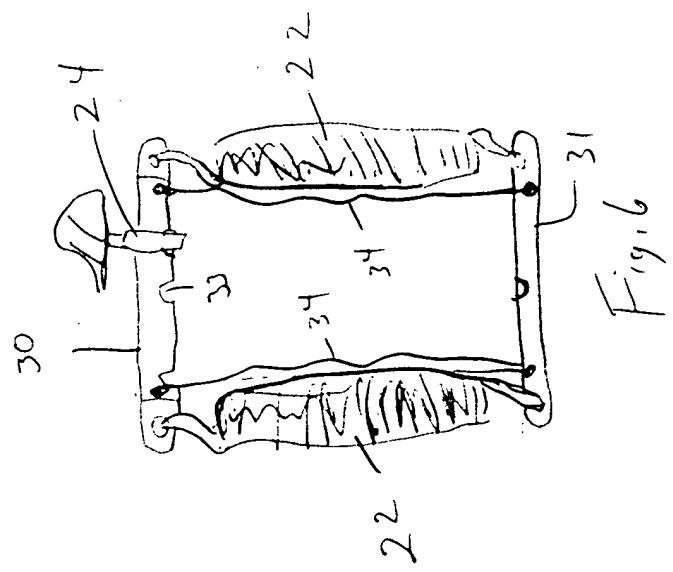


Fig. 6


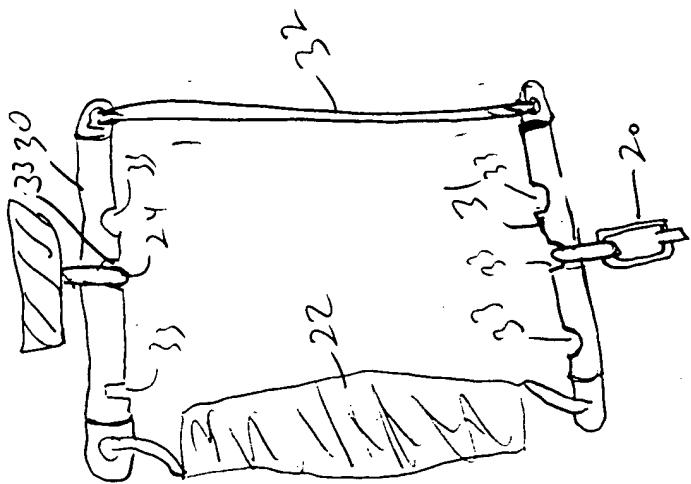


Fig. 6

 Step 1 Remove the "S" Hook from the existing swing assembly.

24

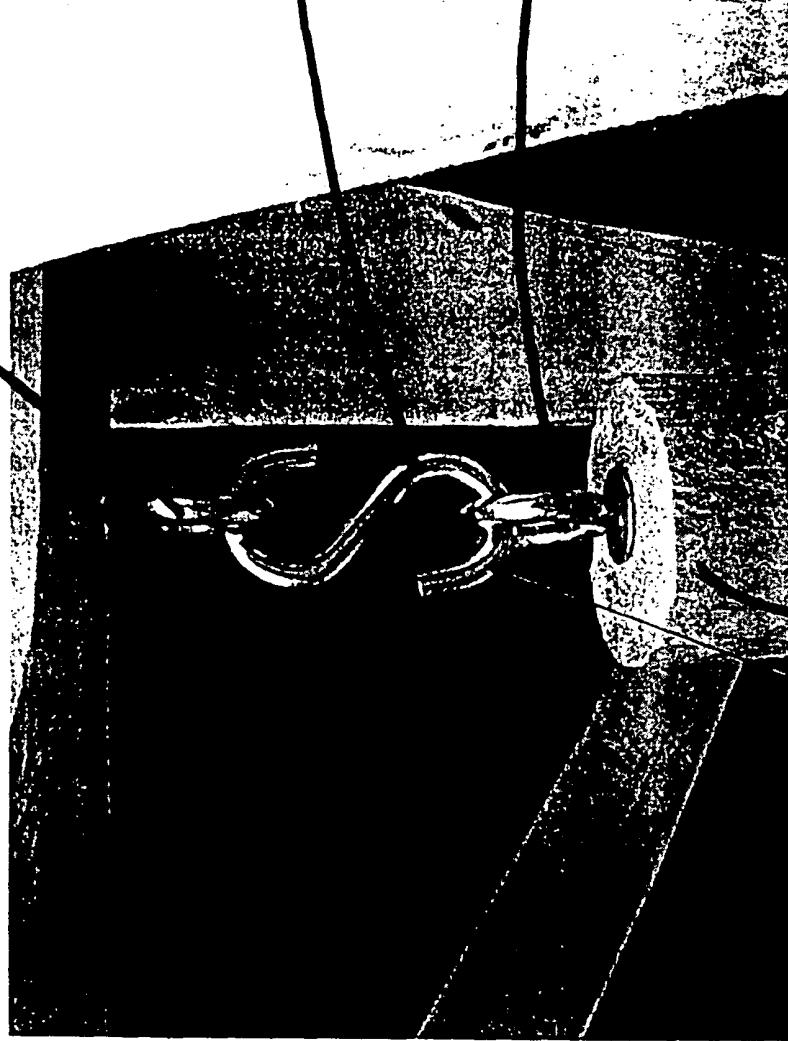

Prior Art

~~E-1007~~

Fig. 7

"S" Hook

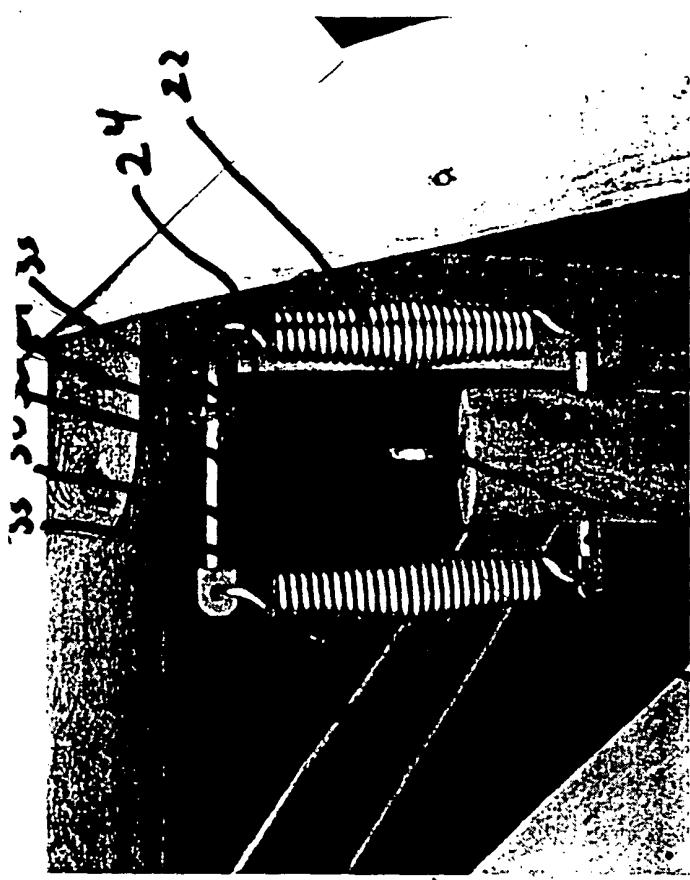


Fig. 8
Fig. 9
Fig. 10

Use this setting for the "Ultra" feel.

Fig. 9

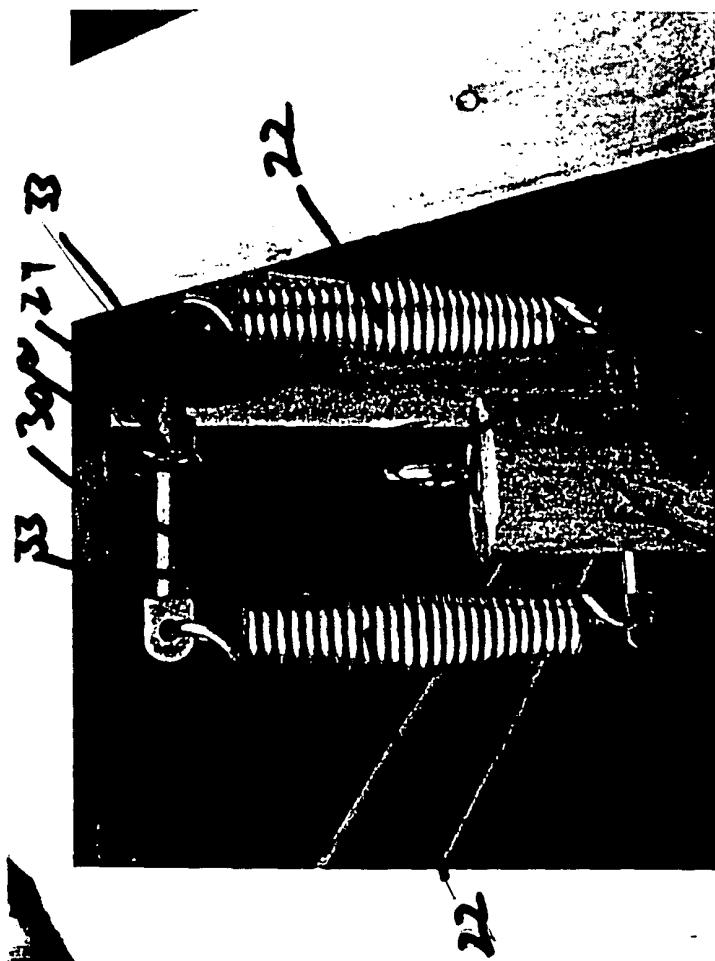


Fig. 8
Fig. 9
Fig. 10

Use this setting for the "Extra Firm" feel.


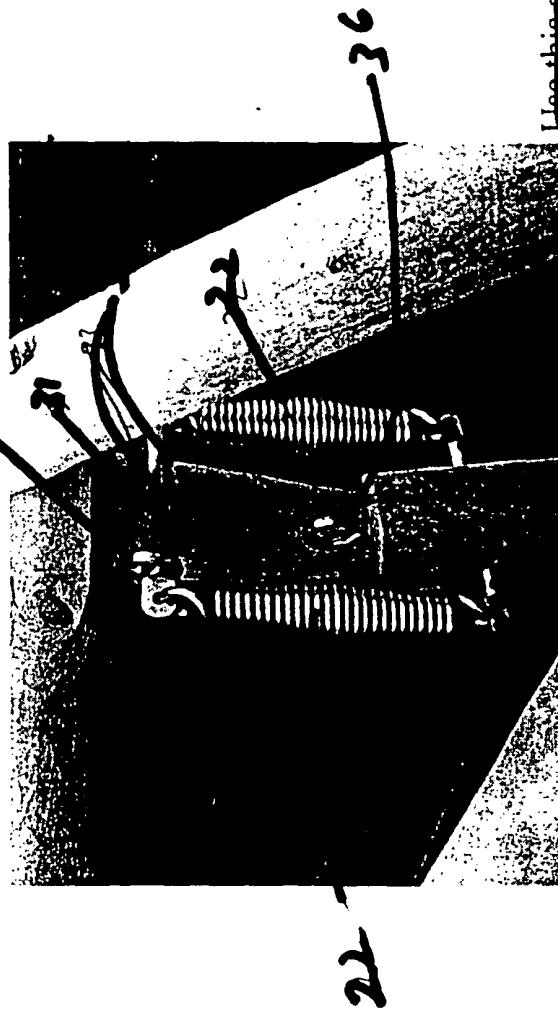


Fig. 10

Use this setting for the "Soft" feel.

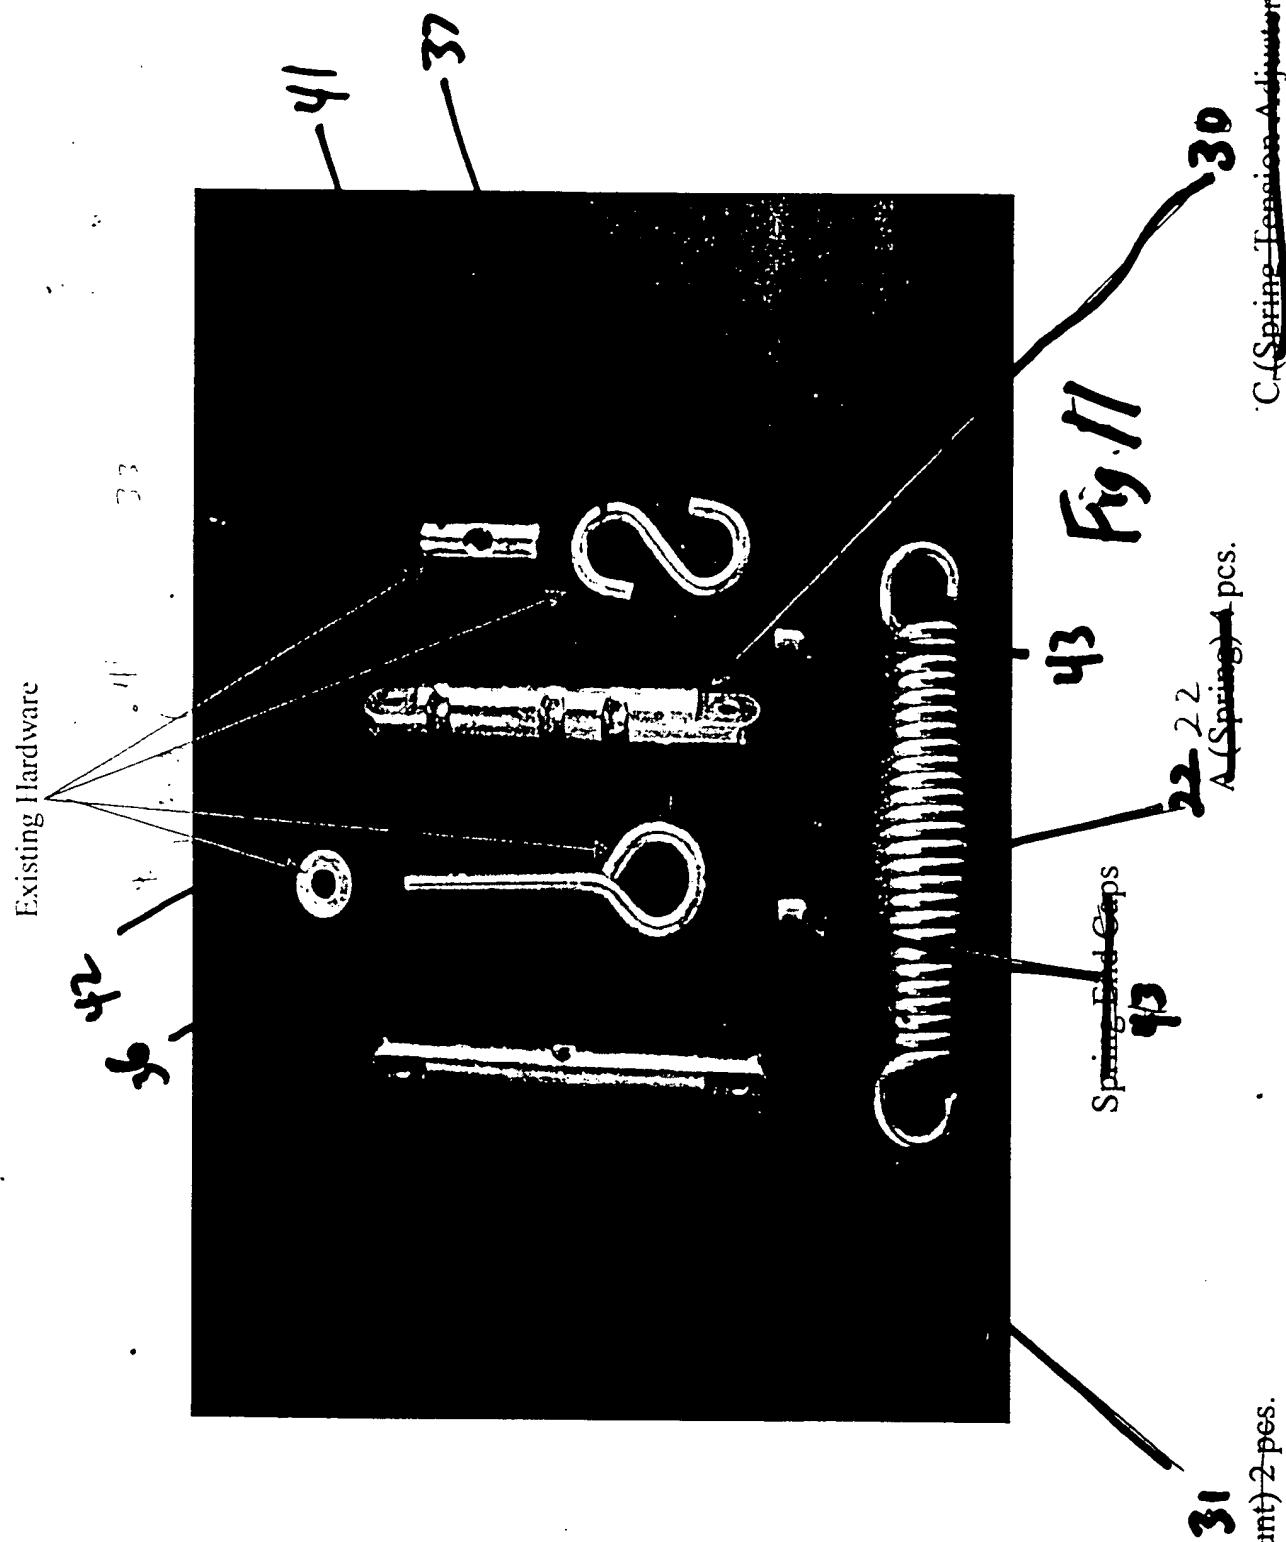

B (Spring Mount) 2 pes.

31

C (Spring Tension Adjuster) 2 pes.

30
22 22
A (Springs) 4 pes.

Fig. 11

43

Spr.
E.
L.
C.

22

30

37

41

Existing Hardware

23